

FORM PTO-1390 (REV 11-2000)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER I-2-130.1US
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. § 371			U.S. APPLICATION NO. (If known, see 37 CFR 1.13) <b>09/868209</b>
INTERNATIONAL APPLICATION NO. PCT/US99/29405	INTERNATIONAL FILING DATE 12 December 1999	PRIORITY DATE CLAIMED 14 December 1998	
TITLE OF INVENTION RANDOM ACCESS CHANNEL PREAMBLE DETECTION			
APPLICANT(S) FOR DO/EO/US Dick et al.			
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:			
<p>1 <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. § 371 <input type="checkbox"/></p> <p>2 <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. § 371 <input type="checkbox"/></p> <p>3 <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. § 371(f)) <input type="checkbox"/> The submission must include items (5), (6), (9) and (21) indicated below <input type="checkbox"/></p> <p>4 <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31) <input type="checkbox"/></p> <p>5 <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. § 371(c)(2))</p> <p style="margin-left: 20px;">a <input checked="" type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau) <input type="checkbox"/></p> <p style="margin-left: 20px;">b <input type="checkbox"/> has been communicated by the International Bureau <input type="checkbox"/></p> <p style="margin-left: 20px;">c <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US) <input type="checkbox"/></p> <p>6 <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. § 371(c)(2)) <input type="checkbox"/></p> <p style="margin-left: 20px;">a <input type="checkbox"/> is attached hereto <input type="checkbox"/></p> <p style="margin-left: 20px;">b <input type="checkbox"/> has been previously submitted under 35 U.S.C. § 154(d)(4) <input type="checkbox"/></p> <p>7 <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. § 371(c)(3))</p> <p style="margin-left: 20px;">a <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau) <input type="checkbox"/></p> <p style="margin-left: 20px;">b <input type="checkbox"/> have been communicated by the International Bureau <input type="checkbox"/></p> <p style="margin-left: 20px;">c <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired <input type="checkbox"/></p> <p style="margin-left: 20px;">d <input checked="" type="checkbox"/> have not been made and will not be made <input type="checkbox"/></p> <p>8 <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. § 371(c)(3)) <input type="checkbox"/></p> <p>9 <input type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. § 371(c)(4)) <input type="checkbox"/></p> <p>10 <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. § 371(c)(5)) <input type="checkbox"/></p> <p><b>Items 11 to 20 below concern document(s) or information included:</b></p> <p>11 <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98 <input type="checkbox"/></p> <p>12 <input type="checkbox"/> An assignment document for recording <input type="checkbox"/> A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included <input type="checkbox"/></p> <p>13 <input type="checkbox"/> A <b>FIRST</b> preliminary amendment <input type="checkbox"/></p> <p>14 <input type="checkbox"/> A <b>SECOND</b> or <b>SUBSEQUENT</b> preliminary amendment <input type="checkbox"/></p> <p>15 <input type="checkbox"/> A substitute specification <input type="checkbox"/></p> <p>16 <input type="checkbox"/> A change of power of attorney and/or address letter <input type="checkbox"/></p> <p>17 <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter2 and 35 U.S.C. § 1821 - 1825 <input type="checkbox"/></p> <p>18 <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. § 154(d)(4) <input type="checkbox"/></p> <p>19 <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. § 154(d)(4) <input type="checkbox"/></p> <p>20 <input checked="" type="checkbox"/> Other items or information:</p> <p style="margin-left: 20px;">1) Thirteen (13) sheets of formal drawings, in triplicate; 2) copy of the International Publication; 3) copy of the International Publication with Search Report; 4) copy of the International Preliminary Examination Report; and 5) Application Data Sheet.</p>			

JC18 Rec'd PCT/PTO 1 4 JUN 2001

0977 868209		INTERNATIONAL APPLICATION NO. PCT/US99/29405		ATTORNEY'S DOCKET NUMBER I-2-130.1US	
21 [X] The following fees are submitted: BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)): Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO [ ] \$1000.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO [ ] \$860.00 International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO [ ] \$710.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) [ ] \$690.00 International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) [ ] \$100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =				CALCULATIONS PTO USE ONLY	
Surcharge of \$130.00 for furnishing the oath or declaration later than [ ] 20 [ ] 30 months from the earliest claimed priority date (37 CFR 1.492(e)) [ ]				\$	860
CLAIMS				\$	
Total claims 16 - 20 = 0				\$	0
Independent claims 8 - 3 = 5				\$	400
MULTIPLE DEPENDENT CLAIM(S) (if applicable) + \$270.00				\$	0
TOTAL OF ABOVE CALCULATIONS =				\$	1260
[ ] Applicant claims small entity status [ ] See 37 CFR 1.27 [ ] The fees indicated above are reduced by 1/2 [ ] +				\$	0
SUBTOTAL =				\$	1260
Processing fee of \$130.00 for furnishing the English translation later than [ ] 20 [ ] 30 months from the earliest claimed priority date (37 CFR 1.492(f)) [ ]				\$	0
TOTAL NATIONAL FEE =				\$	1260
Fee for recording the enclosed assignment (37 CFR 1.21(h)) [ ] The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31) [ ] \$40.00 per property +				\$	40
TOTAL FEES ENCLOSED =				\$	1300
				Amount to be refunded:	\$
				charged:	\$
a [ ] A check in the amount of \$ _____ to cover the above fees is enclosed [ ]					
b [X] Please charge my Deposit Account No. 09-0435 in the amount of \$ 1300 to cover the above fees [ ] A duplicate copy of this sheet is enclosed [ ]					
c [X] The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 09-0435 [ ] A duplicate copy of this sheet is enclosed [ ]					
d [ ] Fees are to be charged to a credit card [ ] WARNING: Information on this form may become public [ ] Credit card information should not be included on this form [ ] Provide credit card information and authorization on PTO-2038 [ ]					
NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.337 (a) or (b)) must be filed and granted to restore the application to pending status [ ]					
SEND ALL CORRESPONDENCE TO: Volpe and Koenig, P.C. Suite 400, One Penn Center 1617 John F. Kennedy Boulevard Philadelphia, PA 19103					
SIGNATURE Gerald B. Hall, Jr., Esquire NAME 37,633 REGISTRATION NUMBER					

13/PRTS

097868209  
JC18 Rec'd PCT/PTO 1 4 JUN 2001

WO 00/36761

PCT/US99/29504

## **RANDOM ACCESS CHANNEL PREAMBLE DETECTION**

### **BACKGROUND OF THE INVENTION**

#### **Field of the Invention**

The present invention relates generally to transmission systems and methods for binary modulated signals. More specifically, the invention relates to a CDMA transmission system for transmitting a modulated signal in a mobile communications environment where transmitting range varies.

#### **Description of the Prior Art**

A communication system has one principle function, to transmit information from a source to a destination. The information generated by the source is typically an electrical signal that changes with time.

The information signal is transmitted from the source to the destination over an appropriate medium, usually referred to as a channel. One method of altering the information signal to match the characteristics of the channel is referred to as modulation. The recovery of the information-bearing signal is called demodulation. The demodulation process converts the transmitted signal using the logical inverse of the modulation process. If the transmission channel were an ideal medium, the signal at the destination would be the same as at the source. However, the reality is that during the transmission process, the signal undergoes many transformations which induce distortion. A receiver at the destination must recover the original information by removing all other effects.

-2-

Most communications currently rely upon the conversion of an analog source into a digital domain for transmission and ultimately reconversion to analog form depending upon the type of information conveyed. The simplest digital representation is where the information in any bit time is a binary value, either a 1 or a 0. To extend the possible range of values that the information can be, a symbol is used to represent more than two possible values. Ternary and quaternary symbols take on three and four values respectively. The varying values are represented by integers, positive and negative, and are usually symmetric. The concept of a symbol allows a greater degree of information since the bit content of each symbol dictates a unique pulse shape. Depending upon the number of levels of a symbol, an equal number of unique pulse or wave shapes exist. The information at the source is converted into symbols which are modulated and transmitted through the channel for demodulation at the destination.

The normal processes of a communication system affect the information in a calculable and controllable manner. However, during the transmission from a source to a destination, a component that cannot be calculated is noise. The addition of noise in a digital transmission corrupts the signal and increases the probability of errors. Other signal corruptions that manifest themselves are multipath distortions due to natural terrain and manmade structures, and distances the signals travel which affect signal timing. The communication system needs to define the predictable transformations that the information signal encounters and during reception of the

information the receiver must possess the means to analyze the predictable transformations that have occurred.

A simple binary transmission system could use a positive pulse for a logical 1 and a negative pulse for a logical 0, with rectangular pulse shapes transmitted by the source. The pulse shape received at the destination undergoes the aforementioned transformations including noise and other distortions.

To minimize the probability of error, the response of a filter used at the receiver is matched to the transmitter pulse shape. One optimal receiver, known as a matched filter, can easily determine whether a transmitted pulse shape is a logical 1 or 0 and is used extensively for digital communications. Each matched filter is matched to a particular pulse shape generated by the transmitter corresponding to a symbol. The matched filter is sampled at the symbol rate to produce an output that correlates the input pulse shape with the response of the filter. If the input is identical to the filter response, the output will produce a large value representing the total energy of the signal pulse. The output usually is a complex quantity that is relative to the input. The optimum performance of the matched filter depends on a precise replica of the received signal pulses which requires accurate phase synchronization. Phase synchronization can easily be maintained with the use of a phase-locked loop (PLL). Pulse synchronization, however, is a problem for matched filters. If the pulses are not time-aligned to one symbol time, intersymbol interference (ISI) appears.

An example prior art communication system is shown in **Figure 1**. The system employs a technique known as code division multiplexing, or more commonly, as code-division multiple access or CDMA.

CDMA is a communication technique in which data is transmitted within a broadened band (spread spectrum) by modulating the data to be transmitted with a pseudo-noise signal. The data signal to be transmitted may have a bandwidth of only a few thousand Hertz distributed over a frequency band that may be several million Hertz. The communication channel may be used simultaneously by  $m$  independent subchannels. For each subchannel, all other subchannels appear as noise.

As shown, a single subchannel of a given bandwidth is mixed with a unique spreading code which repeats a predetermined pattern generated by a wide bandwidth, pseudo-noise (pn) sequence generator. These unique user spreading codes are typically orthogonal to one another such that the cross-correlation between the spreading codes is approximately zero. A data signal is modulated with the pn sequence to produce a digital spread spectrum signal. A carrier signal is then modulated with the digital spread spectrum signal, to establish a forward-link, and transmitted. A receiver demodulates the transmission and extracts the digital spread spectrum signal. The transmitted data is reproduced after correlation with the matching pn sequence. When the spreading codes are orthogonal to one another, the received signal can be correlated with a particular user signal related to the particular spreading code such that only the desired user signal related to the particular

-6-

A random access packet comprises a preamble portion and a data portion. The data may be transmitted in parallel with the preamble. In the prior art, the random access channel typically uses quadrature phase shift keying (QPSK) for the preamble and data.

The base station examines the received preamble for the unique spreading codes. Each symbol of the RACH preamble is spread with a pn sequence. Using matched filters, the base station searches continuously for those codes that correlate. The data portion contains instructions for a desired service. The base station demodulates the data portion to determine what type of service is requested such as a voice call, fax, *etc.* The base station then proceeds by allocating a specific communication channel for the subscriber unit to use for the reverse-link and identifying the spreading codes for that channel. Once the communication channel is assigned, the RACH is released for other subscriber units to use. Additional RACHs afford quicker base station acquisition by eliminating possible collisions between subscriber units simultaneously initiating calls.

Without a subscriber unit pilot signal providing pulse synchronization in the reverse-link, acquisition of the RACH from a mobile subscriber unit is difficult if a coherent coding technique such as PSK is used compounded with transmitting range ambiguity. Since a mobile subscriber unit is synchronized with the base station, the RACH preamble is transmitted at a predefined rate.

An example prior art preamble signature is defined by 16 symbols. A table of sixteen coherent RACH preamble signatures is shown in **Figure 2**. Since each

symbol is a complex quantity and has a pulse shape comprising 256 chips of the spreading pn sequence, each signature comprises 4096 chips. The complete RACH preamble signature is transmitted at a chipping rate of 4096 chips per millisecond or 0.244 chips per microsecond.

From the global pilot signal, each subscriber unit receives frame boundary information. Depending upon the distance from the base station to a subscriber unit, the frame boundary information suffers a forward-link transmission delay. A RACH preamble transmitted in the reverse direction suffers an identical transmission delay. Due to the propagation delay, the perceived arrival time of a RACH preamble at a base station is:

$$\Delta t = \frac{2 (\text{distance})}{C}, \text{ where } C = 3.0 \times 10^8 \text{ m/s.} \quad \text{Equation 1}$$

Due to this inherent delay, the range ambiguity for a subscriber unit varies according to distance. At 100m, the effect is negligible. At 30km, the delay may approach the transmission time of 4 symbols. Table 1 illustrates the effect of round trip propagation delay.

range (km)	round trip time (msec)	chip value	symbol interval
0	0	0	1
5	0.033	137	1
10	0.067	273	2
15	0.100	410	2

range (km)	round trip time (msec)	chip value	symbol interval
20	0.133	546	3
25	0.167	683	3
30	0.200	819	4

**Table 1 - Effect of range ambiguity**

The first column is the distance in km between a mobile subscriber unit and a given base station. The second column is the round trip propagation delay of the RF signal in milliseconds from the base station to a subscriber unit and back. The third column shows the chip clocking position of the matched filter at the base station with time 0 referenced at the start of a transmitted frame boundary. The value represents when a first chip is received from a subscriber unit referencing the beginning of a frame boundary. The fourth column shows the expected location of the first output of the matched filter which occurs after assembling 256 received chips; (reference being made at the start of a frame boundary). A symbol may be output during any one of the first four symbol intervals depending on subscriber unit distance.

Since the base station is not synchronized with the subscriber unit and does not have a carrier reference, the base station does not know where in a received chip sequence the beginning of a RACH preamble symbol begins. The matched filter must correlate a total of 256 chips corresponding to a valid symbol pulse shape. As one skilled in this art knows, as the chips are received, the matched filter assembles

256 chips to produce a first output representative of the pulse shape. Consecutive outputs from the matched filter are generated for each subsequently received chip.

The mobile subscriber unit transmits the preamble part first to access the RACH from the base station. One from among sixteen signatures is randomly selected and one from among five time-offsets is randomly chosen to account for the range ambiguity during transmission. The mobile subscriber unit constantly receives a frame boundary broadcast from the base station. To request a RACH, the mobile subscriber unit transmits a random burst with an  $n \times 2\text{ms}$  time-offset (where  $n = 0, 1, \dots, 4$ ) relative to the received frame boundary as shown in Figure 3. The time-offset (value of  $n$ ) is chosen at random at each random access attempt.

Four received preamble signatures,  $a$ ,  $b$ ,  $c$ , and  $d$  are shown in Figures 4a-d received at the base station. Each signature arrives at one symbol duration (0.0625ms) later due to round trip delay, with each signature representing a different distance between the base station and mobile subscriber unit. Only sixteen consecutive symbols have signal components, the other matched filter outputs represent noise. It is known that range ambiguity will destroy the orthogonality among signatures and degrade performance. The possibility exists that the base station receiver could confuse any combination from a possible nineteen outputs from the matched filter as an incorrect signature.

Accordingly, there exists a need for a CDMA transmission and detection scheme that is accurate notwithstanding communication distance and the effects of Doppler.

## SUMMARY OF THE INVENTION

The present invention relates to a detector that detects a transmitted digital signature using the energy output from a matched filter in conjunction with normal correlation detection. The energies are tabulated according to an anticipated signature pattern for variable transmission distances. The tabulation accounts for expected round trip transmission delays and allows processing of the accumulated symbols to derive a correct signature whether coherent or non-coherent signature coding is used and whether or not multiple Doppler channels are present. Alternative embodiments of the invention include new schemes for differentially encoding RACH preamble signatures.

Objects and advantages of the system and the method will become apparent to those skilled in the art after reading a detailed description of the preferred embodiment.

## BRIEF DESCRIPTION OF THE DRAWINGS

**Figure 1** is a simplified block diagram of a prior art CDMA communication system.

**Figure 2** is a table of sixteen coherent RACH signatures.

**Figure 3** is a timing diagram showing transmission timing for parallel RACH attempts.

**Figure 4A** is a timing diagram showing a 16 symbol RACH preamble signature received during the first symbol interval period.

**Figure 4B** is a timing diagram showing a 16 symbol RACH preamble signature received during the second symbol interval period.

**Figure 4C** is a timing diagram showing a 16 symbol RACH preamble signature received during the third symbol interval period.

**Figure 4D** is a timing diagram showing a 16 symbol RACH preamble signature received during the fourth symbol interval period.

**Figure 5** is a detailed block diagram of a CDMA communication system.

**Figure 6A** is a prior art system diagram of a random access channel preamble detector.

**Figure 6B** is a random access channel preamble detector made in accordance with the present invention..

**Figure 7A** is a diagram of the symbol memory matrix.

**Figure 7B** is a flow diagram of the procedure for tentatively detecting preamble signatures.

**Figure 7C** is a flow diagram of the procedure for resolving range ambiguity.

**Figure 8** is a table showing four possible combinations of received preamble signature symbols to resolve range ambiguity.

**Figure 9** is a table showing the relationship between orthogonality and range ambiguity.

**Figure 10** is a table of sixteen non-coherent RACH signatures.

**Figure 11** is a system diagram of a non-coherent RACH preamble detector.

-12-

**Figure 12A** is a system diagram of a coherent RACH preamble detector correcting for multiple Doppler channels.

**Figure 12B** is a detailed diagram of a preamble correlator.

**Figure 13** is an alternative embodiment of the present invention.

**Figure 14** is the encoding rule for the alternative embodiment of the present invention.

**Figure 15** is an uncoded sequence and its transformation into a differentially coded sequence.

**Figure 16** is a transmitted signature of the sequences of **Figure 15**.

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

The preferred embodiment will be described with reference to the drawing figures where like numerals represent like elements throughout.

A CDMA communication system 25 as shown in **Figure 5** includes a transmitter 27 and a receiver 29, which may reside in either a base station or a mobile subscriber unit. The transmitter 27 includes a signal processor 31 which encodes voice and nonvoice signals 33 into data at various rates, *e.g.* 8 kbps, 16 kbps, 32 kbps, 64 kbps or other rates as desired for the particular application. The signal processor 31 selects a rate in dependence upon the type of signal, service or in response to a set data rate.

By way of background, two steps are involved in the generation of a transmitted signal in a multiple access environment. First, the input data 33 which

-13-

can be considered a bi-phase modulated signal is encoded using a forward error-correction (FEC) encoder 35. For example, if a  $R=1/2$  convolution code is used, the single bi-phase modulated data signal becomes bivariate or two bi-phase modulated signals. One signal is designated the in-phase channel I 41a. The other signal is designated the quadrature channel Q 41b. A complex number is in the form  $a + bj$ , where  $a$  and  $b$  are real numbers and  $j^2 = -1$ . Bi-phase modulated I and Q signals are usually referred to as QPSK.

In the second step, the two bi-phase modulated data or symbols 41a, 41b are spread with a complex pseudo-noise (pn) sequence 43a, 43b. The QPSK symbol stream 41a, 41b is multiplied by a unique complex pn sequence 43a, 43b. Both the I and Q pn sequences 43a, 43b are comprised of a bit stream generated at a much higher rate, typically 100 to 200 times the symbol rate. The complex pn sequence 43a, 43b is mixed at mixers 42a, 42b with the complex-symbol bit stream 41a, 41b to produce the digital spread signal 45a, 45b. The components of the spread signal 45a, 45b are known as chips having a much smaller duration. The resulting I 45a and Q 45b spread signals are upconverted to radio frequency by mixers 46a, 46b, and are combined at the combiner 53 with other spread signals (channels) having different spreading codes, mixed with a carrier signal 51 to upconvert the signal to RF, and radiated by antenna 54 as a transmitted broadcast signal 55. The transmission 55 may contain a plurality of individual channels having different data rates.

The receiver 29 includes a demodulator 57a, 57b which downconverts the received revision of transmitted broadband signal 55 at antenna 56 into an intermediate carrier frequency 59a, 59b. A second down conversion at the mixers 58a, 58b reduces the signal to baseband. The QPSK signal is then filtered by the filters 61 and mixed at mixers 62a, 62b with the locally generated complex pn sequence 43a, 43b which matches the conjugate of the transmitted complex code. Only the original waveforms which were spread by the same code at the transmitter 27 will be effectively despread. All other received signals will appear as noise to the receiver 29. The data 65a, 65b is then passed to a signal processor 67 where FEC decoding is performed on the convolutionally encoded data.

After the signal has been received and demodulated, the baseband signal is at the chip level. Both the I and Q components of the signal are despread using the conjugate of the pn sequence used during spreading, returning the signal to the symbol level.

To establish a reverse-link from a mobile subscriber unit to a base station, the mobile subscriber unit transmits a random access packet transported on a RACH. The transmission of the RACH is similar to what was described except the RACH does not undergo FEC. There may also be more than one RACH employed in the communication system 25.

A table showing 16 possible coherent PSK coded RACH 71 preamble signatures 73 is shown in Figure 2. Each signature comprises 16 symbols. Each symbol  $A$  is a complex number  $A=1+j$ . A discussion of the coding methods and

complex numbers is beyond the scope of this disclosure and is known to those skilled in this art.

A prior art coherent RACH 71 detector 75 is shown in Figure 6A. After the receiver 29 demodulates the RACH 71 carrier, the demodulated signal 77 is input to a matched filter 79 for despreading the RACH preamble 73. The output of the matched filter 79 is coupled to a preamble correlator 81 for correlating the RACH preamble 73 with a known preamble pn sequence representing the preamble code 83. The output of the preamble correlator 81 will have peaks 85 corresponding to the timing 87 of any received random access burst using the specific preamble code 83. The estimated timing 87 can then be used in an ordinary RAKE 89 combiner for the reception of the data part of the RACH 71 burst. Although this detector 75 may work well under ideal conditions with the coherent PSK coded preamble signatures 73 shown in Figure 2, its operation may be adversely affected due to range ambiguity and the presence of Doppler.

In a first embodiment of the present invention, non-coherent detection can be utilized. In this embodiment, the coherent RACH preamble signatures 73 shown in Figure 2 are differentially encoded, (i.e., differential phase shift keyed (DPSK) processed). Accordingly, the coherent preamble signatures 73 are first translated into incoherent, DPSK coded signals prior to transmission, and then differentially decoded after reception.

-16-

The method of translating the coherent symbols into non-coherent symbols is performed in accordance with the following steps, (where  $i$  = rows and  $j$  = columns). First:

if  $S_{old}(i,1) = -A$ ; multiply all  $j$  corresponding to  $i$  by -1. **Equation 2**

For example, for signature 4 ( $i=4$ ) shown in **Figure 2**:

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
4	-A	A	-A	A	-A	-A	-A	-A	-A	A	-A	A	-A	A	A	A

multiply by -1

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
4	A	-A	A	-A	A	A	A	A	A	-A	A	-A	A	-A	-A	-A

After the first step, the old preamble signatures would consist of the original undisturbed signatures (1, 3, 5, 8, 9, 11, 12 and 13) and the signatures multiplied by -1 (2, 4, 6, 7, 10, 14, 15 and 16).

The second step of the translation process translates each consecutive symbol of a preamble signature 73:

$$S_{new}(i,j) = A \text{ if: } S_{old}(i,j) = S_{new}(i,j-1) \quad \text{Equation 3}$$

$$S_{new}(i,j) = -A \text{ if: } S_{old}(i,j) \neq S_{new}(i,j-1) \quad \text{Equation 4}$$

Continuing with the example, for signature 4 ( $i=4$ ):

$$S_{old}(4,2) \neq S_{new}(4,2-1)$$

$$-A \neq A$$

-17-

therefore;  $S_{\text{new}}(4, 2) = -A$

The remainder of the DPSK coding is performed for each consecutive symbol of a given preamble signature 73. The process translates all 16 preamble signatures 73 into the differential preamble signatures 97 shown in Figure 10. The DPSK translation may be calculated and loaded into firmware as part of the mobile subscriber unit or may be calculated when initiating a call depending upon the sophistication of the base station receiver. For the DPSK preamble signatures, the same process as hereinbefore described for coherent processing may be performed except that the received signal must be recovered by differential decoding before correlating with the preamble signatures.

A RACH detector 101 made in accordance with present invention 95 is shown in Figure 6B. As previously described with reference to the prior art receiver 75, the received RACH 77 is demodulated and coupled to the input of the matched filter 79. The output of the matched filter 79 is coupled to the RAKE 89, to a time delay 103 and a first mixer 105. Each received signature 97 is delayed by one symbol length, which is 256 chips. The output of the time delay 103 is coupled to conjugate processor 107 which converts the received symbol to its complex conjugate. The output of the complex conjugate processor 107 is coupled to the first mixer 105 where the real part of the complex number is selected 106 and multiplied by the signature symbol and output to the preamble correlator 81. The preamble correlator 81 correlates a possible signature with a sequence of outputs. This sum is compared to a threshold in the peak detector 85 and if it exceeds the threshold by

the end of the sixteenth symbol, it is determined that a signature has been detected. Since there are 16 computations, one for each signature, there may be more than one accumulation that exceeds its threshold for a given sample time. In this case, the accumulation with the largest value is selected as correct. The estimated timing 87 can then be used in an ordinary RAKE 89 combiner for the reception of the data part of the RACH 71 burst.

In accordance with a second embodiment of the present invention, the energy from each output of the RACH detector matched filter 79 is computed. Although the matched filter 79 is typically sampled at the chipping rate, it may be oversampled at twice or four times the chipping rate, (or even higher). In this embodiment, the chipping rate is 4.096 million chips per second, or one chip every  $0.244\mu\text{s}$ .

Shown in Figure 7A is a memory matrix 101 stored in RAM 100 where the value of the energy computed for each symbol output from the matched filter 79 is stored. The matrix 101 is arranged to store all possible delayed symbol values corresponding to base station to subscriber unit transmission distances ranging from 100m to 30km. The matrix 101 consists of 256 rows (0-255) 102 and 19 columns (0-18) 104 representing the total number of chips transmitted during a RACH preamble signature. If the subscriber unit were located adjacent to the base station where propagation delay would be negligible, the first symbol would be output after 256 chips were received or at  $P(255,0)$ . If the subscriber unit were located at 30km, the first symbol would be output after 819 chips were received or at approximately  $P(54,4)$ . Regardless of transmission distance, every 256 chips later would produce

another symbol, and so on, thereby completing an entire row. Since sixteen symbols define a preamble signature, the matrix **101** allows for three additional symbol outputs to anticipate range ambiguity, (shown in **Figure 4**, as will be explained in greater detail hereinafter). Once the matrix **101** is populated, it includes all samples of interest for the mobile subscriber unit out to a range of 30 km.

Each output **97** from the matched filter **79** is a complex number:

$$z(ik) = x(ik) + jy(i,k); \text{ where } i = 0 \text{ to } 255 \text{ and } k=0 \text{ to } 18. \text{ Equation 5}$$

The value for instantaneous energy, which is the sum of the squares of real and imaginary parts of each output, is computed as:

$$P(i,k) = z(i,k) z(i,k)^* = x^2 + y^2, \text{ Equation 6}$$

and stored within the matrix **101**.

Because a preamble signature is from a set of 16 symbols, each with a pre-specified chip pattern, a match filter output is expected to produce a larger than average output 16 times, each larger value separated from the previous one by 256 chips. The combined output is the sum of the matched filter outputs speed by 256 chips. One problem that must be overcome is that the first matched filter output does not automatically occur within the first 256 chips. It can occur later, as shown in

**Table 1**, depending upon the distance between the mobile subscriber unit and the base station.

When a preamble signature is present, its corresponding matched filter outputs will fill 16 of the 19 elements of one of the 256 rows **102**. For each row, a complete preamble signature may be detected where the value of total energy summed for the row exceeds a predetermined threshold.

Referring to **Figure 7B**, the procedure **200** for tentatively detecting preamble signatures is shown. Once the matrix **101** is populated (**step 201**), the value of energy for each row is summed **109** and similarly stored (**step 202**). For those rows where the sum exceeds a predetermined threshold, the row is considered to be a "tentative detection". The sum for the first row is compared to a predetermined threshold (**step 204**) to determine if the sum exceeds the threshold (**step 206**). If so, the row is marked as a tentative detection (**step 208**). If each row has not been summed (**step 210**), the next row is retrieved (**step 212**) and the process is repeated (**steps 206-210**). Once all the rows have been summed, the range ambiguity on each tentative detection is resolved (**step 214**), (which will be described in greater detail hereinafter), and the candidates are output (**step 216**).

As indicated above, due to the location of the mobile subscriber unit, range ambiguity is introduced whereby the preamble signature may not occur for up to four symbols. This range ambiguity must be resolved. Accordingly, for each row marked as a tentative detection, the value of the energy of the 16 consecutive positions within that row which produce the highest sum must be determined. Due to range

ambiguity, four possible cases 1, 2, 3 and 4 are derived from a received version of a preamble signature. The four cases are shown in **Figure 8**. In this example, signature 1 was transmitted and assembled from nineteen received symbols, forming one row of the memory matrix 101. For each case, sixteen consecutive symbols out of nineteen are correlated with each of the sixteen possible preamble signatures, resulting in 64 hypotheses. One of the 64 hypotheses will result in a signature having the greatest energy received. The greatest of the 64 hypotheses will occur in case 1 since case 1 has all consecutive symbols and does not include noise. Cases 2, 3 and 4 include symbols derived from noise components and will not correlate with one of the sixteen preamble signatures.

Referring to **Figure 7C**, the procedure 300 for resolving range ambiguity in accordance with the present invention is shown. As was described with reference to **Figure 8**, each row comprises 19 total positions. Referring back to **Figure 7C**, the values of the energy of the first 16 consecutive positions of a row considered to be a tentative detection are analyzed (step 301). The energy sum for the 16 positions is calculated (step 302) and then stored (step 304). If the sums of all positions within the row have not been calculated (step 306) the next 16 consecutive positions, corresponding to elements 2-17, are reviewed (step 308). The counter is then incremented (step 310) and the procedure is then repeated (step 302-306). Once the sums of all positions have been calculated, all of the sums are compared to determine if the 16 consecutive positions within the row that have the greatest sum (step 312). The system then outputs the value of the column (k) corresponding to the beginning

-22-

of the 16 consecutive positions having the greatest sum (step 314). This is a selected candidate. This procedure is repeated for each tentative detection.

The process described with reference to Figure 7C can be summarized in pseudo code as follows:

```

row i(i=0 to 255)
  sum(k)=0; k =0,1,2,3
  for k = 0 to 3, do
    sum(k) = sum(k) + P(i,n+k-1)
  next k

then;

  Select k for max sum(k)
  maxk=0
  max = sum(0)
  for k = 1 to 3
    if sum(k)>max then
      max=sum(k)
      maxk=k
  next k.

```

The selected candidates are compared with the output of a normal correlation detection process for coherent or incoherent PSK coding. The discussion of a

normal correlation detection process is beyond the scope of this application and is well known to those skilled in this art.

Referring to **Figure 9**, a table of the relationship between orthogonality and range ambiguity is shown. The first column is the signature with which a received signal correlates. The second through fifth columns are the correlation values of cases 1-4. The larger the correlation value, the better the received match to the received signal. A zero correlation value indicates the received symbol is orthogonal to the respective signature symbol. As can clearly be seen, orthogonality does not exist among the respective signatures for cases 2, 3 and 4.

The correlation values shown in **Figure 9** are calculated as:

$$\frac{100}{1024} \left| \bar{s}^{(1)} \bullet \bar{s}^{(k)H} \right|^2 = \frac{100}{1024} \left| \sum_{i=0}^{15} P_i^{(1)} \bullet P_{i+l}^{*(k)} \right|^2, k = 1, 2, \dots, 16; \quad \text{Equation 7}$$

where  $k = 1$  for signature 1,  $k = 2$  for signature 2, ...  $k = 16$  for signature 16 and for case 1,  $l = 0$ ; case 2,  $l = 1$ ; case 3,  $l = 2$ ; and case 4,  $l = 3$ . The value 1024 is derived by:

$$1024 = \left| \bar{s}^{(1)} \bullet \bar{s}^{(1)H} \right|^2, \text{ where } \bar{s}^{(1)} = \text{signature 1}, \quad \text{Equation 8}$$

and where

A RACH detector **95** made in accordance with this embodiment of the present invention is shown in **Figure 11**. As previously described in the prior art receiver shown in **Figure 6**, the received RACH **77** is demodulated and coupled to the input of the matched filter **79**. The output of the matched filter **79** is coupled to the RAKE **89**, to a time delay unit **103**, a first mixer **105**, and a first processor **99**. Each received preamble signature **97** is delayed by one symbol length  $T_s$ , which is 256 chips, in the delay unit **103**. The output of the time delay unit **103** is coupled to conjugate processor **107** which converts the received symbol to its complex conjugate. The output of the complex conjugate processor **107** is coupled to the first

mixer **105** where the real part of the complex number is multiplied by the preamble signature symbol and output to the preamble correlator **81**. The preamble correlator **81** correlates a possible signature with a sequence of outputs based on the symbol sequence. This sum is compared to a threshold, and if it exceeds the threshold by the end of the sixteenth symbol, a signature is detected. Since there are 16 computations, one for each signature, there may be more than one accumulation that exceeds its threshold for a given sample time. In that case, the accumulation with the largest value is selected as correct.

Contemporaneous with the above-described signature correlation, the matched filter **79** output **97** is input to the first processor **99** which computes the value of the energy for each symbol output. For each energy value computed, it is stored in the memory matrix **101**. As previously described, after the energy values have been computed for a row of 19 symbols, a second processor **109** computes the summed energy for that given row which is then stored in a second memory **111**. It should be noted that the memory matrix **101** and the second memory **111** may actually comprise a single RAM memory, instead of two separate components as shown. The energy exceeding a predetermined threshold is a tentative detection. After an accumulation of 256 possible signatures comprising 19 symbols has been accumulated in the second memory **111**, a third processor **113** compares the 256 energy levels to normal signature detection on a one-to-one basis, thereby cross-verifying the results of each process to arrive at the correct signature sequence received.

To account for multiple Doppler channels, an alternative embodiment resolves the channels similar to the four case approach discussed above. To account for the Doppler channels, a phase rotation is introduced. The phase rotation corrects and compensates the phase changes experienced due to Doppler spreading. For coherent detection with  $m$  Doppler channels,  $m \times 4 \times 16$  hypotheses are created. The greatest of  $m \times 4 \times 16$  hypotheses is selected and the corresponding signature is identified.

If a received sequence is  $r(t)$ , each time 19 samples  $r(n\Delta t)$ ,  $n = 1, 2, 3, \dots, 19$ , are collected, four cases,  $n = 1, 2, 3, \dots, 16$  (case 1),  $n = 2, 3, 4, \dots, 17$  (case 2),  $n = 3, 4, 5, \dots, 18$  (case 3), and  $n = 4, 5, 6, \dots, 19$  (case 4) are considered. To resolve Doppler, each case is then correlated with 16 signatures with  $m$  different phase rotations corresponding to  $m$  Doppler channels. The outputs of the correlation with phase rotations are;

$$y_{ik} = \sum_{n=1}^{16} \left| r(n\Delta t) \times \bar{s}_i \times \exp(-j \cdot 2\pi f_{0k} n\Delta t) \right|^2, \text{Equation 10}$$

where  $i = 1, 2, 3, \dots, 16$ ;  $k = 1, 2, 3, \dots, m$ ;  $2\pi f_{0k}$  is the phase rotation of  $k$ th Doppler channel; and  $s_i$ , where  $i = 1, 2, 3, \dots, 16$  are possible signatures.

An example frequency rotation of five Doppler channels is:  $(f_{01}, f_{02}, f_{03}, f_{04}, f_{05}) = (-200 \text{ Hz}, -100 \text{ Hz}, 0, 100 \text{ Hz}, 200 \text{ Hz})$ ; with a spacing of 100 Hz in between. Each case generates  $m \times 16$  hypotheses. Four cases create  $m \times 16 \times 4$  hypotheses. The preamble signature with the greatest correspondence to  $m \times 16 \times 4$  hypotheses is selected.

A receiver using coherent detection with multiple Doppler channels made in accordance with this embodiment of the present invention is shown in **Figures 12A-B**. In **Figure 12A**, the received RACH 77 is coupled to the matched filter 79 to correlate with a spreading code (256 chips). As discussed above, one symbol is output from the matched filter every 256 chips until nineteen symbol outputs are collected and stored in the memory matrix 101. Sixteen consecutive symbol outputs among nineteen symbol outputs are assembled and the four cases are formed.

Each of the four sixteen consecutive sample cases is correlated in the preamble correlator 119 with each of the sixteen preamble sequences on  $m$  Doppler channels. The generated  $m \times 16 \times 4$  hypotheses with are then stored in a second memory 121. The case with the greatest energy from the  $m \times 16 \times 4$  hypotheses is selected 123 and the corresponding preamble signature is identified. **Figure 12B** shows a detailed block diagram of the preamble correlator for a given preamble sequence and a given Doppler channel, (i.e., having frequency shift of  $f_{0k}$ ,  $k = 1 \dots m$ ).

An alternative embodiment of the present invention is based on the  $16 \times 16$  signature matrix shown in **Figure 13**. In utilizing this embodiment of the present invention, a new signature set is created by differentially encoding the signature matrix set forth in **Figure 13**. The encoding rule is as follows. First,  $S(i,k)$ ,  $M(i,k)$  and  $R(i,k)$  are defined as:

$S(i,k)$  = kth element of signature  $i$ ;

$M(i,k)$  = kth element of proposed new transmitted signature set; and

-28-

$R(i,k)$  = kth element of the proposed new replica set, to be stored in the receiver.

Then the elements are mapped as follows: map A  $\rightarrow$  1 and B  $\rightarrow j = \sqrt{-1}$ , and set  $M(i,0) = A = 1$  and set  $R(i,0) = A = 1$ . For  $k = 1$  to 15 we have the following:

$$M(i,k) = M(i,k-1) \times S(i,k) \quad \text{Equation 11}$$

$$R(i,k) = S^*(i,k) \quad \text{Equation 12}$$

\* denotes complex conjugate:

If  $S(i,k) = 1$ ,  $R(i,k) = 1$

If  $S(i,k) = j$ ,  $R(i,k) = -j$

This rule can be summarized in **Figure 14**, where the left column represents the four possible values of  $M(i,k-1)$  and the top row represents the four possible values of  $S(i,k)$ . **Figure 15** shows an original uncoded sequence and its transformation into a differentially encoded sequence.

In the receiver, these symbols are the differentially decoded. Arbitrarily starting with  $D(0) = 1$ , the decoded symbols  $D(k)$ ,  $k = 0 \dots 15$  are given in terms of the received coded symbols  $C(k)$  as:

$$D(i,k) = C(i,k) \times C(i,k-1)^* \quad \text{Equation 13}$$

The correlation against the preamble signature is then performed, whereby  $\text{Sum}(i) = 0$ . For  $i = 0$  to 15

$$\text{Sum}(i) = \text{Sum}(i) + D(i,k) \times R(i,k) \quad \text{Equation 14}$$

WO 00/36761

PCT/US99/29504

-29-

The full new transmitted signature set is shown in **Figure 16**. This same technique can be applied to the preamble signatures shown in **Figure 13** by replacing A by B; and B by A.

\* \* \*

-30-

What is claimed is:

1. A method for non-coherently coding a preamble signature  $S_{old}$ , having a plurality of symbols A, for a random access channel in a CDMA communication system comprising the steps of:

5 a) multiplying said preamble signature  $S_{old}$  symbols A by -1 if a first symbol of the preamble signature is negative;

b) translating said preamble signature  $S_{old}$  symbols A into non-coherently coded signature  $S_{new}$  symbols, where  $j$  = symbol positions greater than 1, by satisfying the conditions:

10 1)  $S_{new}(j) = A$  if:  $S_{old}(j) = S_{new}(j-1)$ ;

2)  $S_{new}(j) = -A$  if:  $S_{old}(j) \neq S_{new}(j-1)$ ; and

c) performing step b) for each consecutive symbol of the preamble signature  $S_{old}$ .

2. The method according to claim 1 wherein the preamble signature  $S_{new}$  is transmitted and detected, and said detection comprises the steps of:

a) demodulating the random access channel;

5 b) despreading the random access channel to obtain said preamble signature  $S_{new}$ ;

c) analyzing each symbol A within said despread preamble signature  $S_{new}$ ;

- d) delaying by one symbol said despread preamble;
- e) computing a complex conjugate for said delayed preamble symbol; and
- f) multiplying said complex conjugate with said despread preamble

10 signature  $S_{new}$ .

3. A method for non-coherently coding a preamble signature for a random access channel for transmission and detection in a communication system using a code-division multiple access air interface comprising the steps of:

a) examining each consecutive symbol A of the preamble signature  $S_{old}$ ;

5 b) multiplying all said preamble signature  $S_{old}$  symbols A by -1 if a first symbol of the signature is negative;

c) using said first preamble signature  $S_{old}$  symbol for a first translated incoherently coded preamble signature  $S_{new}$  symbol;

10 d) translating said preamble signature  $S_{old}$  symbols A into incoherently coded signature  $S_{new}$  symbols where j = symbol positions greater than 1 by satisfying the conditions:

1)  $S_{new}(j) = A$  if:  $S_{old}(j) = S_{new}(j-1)$ ;

2)  $S_{new}(j) = -A$  if:  $S_{old}(j) \neq S_{new}(j-1)$ ; and

15 e) performing step d) for each consecutive symbol of the preamble signature  $S_{old}$ .

-32-

4. The method according to claim 3 wherein the preamble signature  $S_{\text{new}}$  is transmitted and detected, and said detection comprises the steps of:

- a) demodulating the random access channel;
- b) despread the random access channel to obtain said preamble  
20 signature  $S_{\text{new}}$ ;
- c) analyzing each symbol A within said despread preamble signature  $S_{\text{new}}$ ;
- d) delaying by one symbol said despread preamble;
- e) computing a complex conjugate for said delayed preamble symbol; and
- f) multiplying said complex conjugate with said despread preamble  
25 signature  $S_{\text{new}}$ .

5. An encoding system for non-coherently coding a preamble signature for a random access channel for transmission and detection in a communication system using a CDMA air interface comprising:

- means for examining each consecutive symbol A of the preamble signature  
5  $S_{\text{old}}$ ;
- means for multiplying all said preamble signature  $S_{\text{old}}$  symbols A by -1 if a first symbol of the signature is negative;
- means for using said first preamble signature  $S_{\text{old}}$  symbol for a first translated incoherently coded preamble signature  $S_{\text{new}}$  symbol; and

10 means for translating said preamble signature  $S_{old}$  symbols  $A$  into incoherently coded signature  $S_{new}$  symbols where  $j$  = symbol positions greater than 1 by satisfying the conditions:

$$1) S_{new}(j) = A \text{ if: } S_{old}(j) = S_{new}(j-1);$$

$$2) S_{new}(j) = -A \text{ if: } S_{old}(j) \neq S_{new}(j-1); \text{ whereby said translating means}$$

15 operates on each consecutive symbol of the preamble signature  $S_{old}$ .

6. The system of claim 5 wherein the preamble signature  $S_{new}$  is transmitted and detected, and said system further includes a detector which comprises:

a demodulator for demodulating the random access channel;

a despreaders for despread the random access channel to obtain said

5 preamble signature  $S_{new}$ ;

an analyzer for analyzing each symbol  $A$  within said despread preamble signature  $S_{new}$ ;

means for delaying by one symbol said despread preamble;

means for computing a complex conjugate for said delayed preamble symbol;

10 and

a multiplier for multiplying said complex conjugate with said despread preamble signature  $S_{new}$ .

7. An encoding system for non-coherently coding a preamble signature  $S_{old}$ , having a plurality of symbols  $A$ , for a random access channel in a CDMA communication system, said encoding system comprising:

means for multiplying said preamble signature  $S_{old}$  symbols  $A$  by -1 if a first  
5 symbol of the preamble signature is negative; and

means for translating said preamble signature  $S_{old}$  symbols  $A$  into non-coherently coded signature  $S_{new}$  symbols, where  $j$  = symbol positions greater than 1, by satisfying the conditions:

$$1) S_{new}(j) = A \text{ if: } S_{old}(j) = S_{new}(j-1);$$

10 2)  $S_{new}(j) = -A$  if:  $S_{old}(j) \neq S_{new}(j-1)$ ; whereby said translating means translates each consecutive symbol of the preamble signature  $S_{old}$ .

8. The system of claim 7 wherein the preamble signature  $S_{new}$  is transmitted and detected, said system further including a complimentary detector comprising:

a demodulator for demodulating the random access channel;

5 means for despreading the random access channel to obtain said preamble signature  $S_{new}$ ;

means for analyzing each symbol  $A$  within said despread preamble signature  $S_{new}$ ;

delay means for delaying by one symbol said despread preamble; and

-35-

10 a processor for computing a complex conjugate for said delayed preamble symbol and; for multiplying said complex conjugate with said despread preamble signature  $S_{\text{new}}$ .

9. A method for detecting a coded signature over a CDMA air interface where transmitting range ambiguity exists, comprising the steps of:

a) receiving at a base station a series of transmitted chips corresponding to symbols for a predetermined signature;

5 b) inputting said chips into a matched filter at the base station;

c) calculating energies for each output of said matched filter;

d) tabulating each said energy consecutively;

e) including additional energies output from said matched filter with said energies derived from said received chips to account for range ambiguity;

10 f) correlating a predefined number of consecutive energies from said tabulated additional energies and said chip derived energies with a set of predefined signature energies; and

g) repeating step f) until the transmitted signature is identified.

10. The method according to claim 9 wherein the coded signature is coherently coded.

-36-

11. The method according to claim 9 wherein the coded signature is non-coherently coded.

12. A method for detecting a coded signature, comprising a predetermined plurality of symbols, over a CDMA air interface where transmitting range ambiguity exists, the method comprising the steps of:

5 a) receiving a series of transmitted chips corresponding to said predetermined plurality of symbols;

b) inputting said chips into a matched filter;

c) storing a plurality of outputs from said matched filter, said plurality of outputs being greater in number than said plurality of symbols;

d) correlating said plurality of outputs with a set of predefined signatures; and

10 e) repeating step d) until the coded signature is identified.

13. The method according to claim 12 wherein the coded signature is coherently coded.

14. The method according to claim 12 wherein the coded signature is non-coherently coded.



## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau(43) International Publication Date  
22 June 2000 (22.06.2000)

PCT

(10) International Publication Number  
WO 00/36761 A3(51) International Patent Classification<sup>7</sup>: H04B 1/707,  
H04J 13/00

(21) International Application Number: PCT/US99/29504

(22) International Filing Date:  
14 December 1999 (14.12.1999)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/112,299 14 December 1998 (14.12.1998) US  
60/116,284 19 January 1999 (19.01.1999) US  
60/125,418 22 March 1999 (22.03.1999) US  
60/129,177 14 April 1999 (14.04.1999) US(71) Applicant (for all designated States except US): INTER-  
DIGITAL TECHNOLOGY CORPORATION [US/US];  
Suite 527, 300 Delaware Avenue, Wilmington, DE 19801  
(US).


(72) Inventors; and

(75) Inventors/Applicants (for US only): DICK, Stephen,


G. [US/US]; 61 Bobann Drive, Nesconset, NY 11767  
(US). DENNEAN, Charles [US/US]; 53 Vermont Street,  
Melville, NY 11747 (US). ZEIRA, Eldad [US/US]; 8 Old  
Oak Road, Trumbull, CT 06611 (US). PAN, Jung-Lin  
[—/US]; 31 Oneida Avenue, South Setauket, NY 11720  
(US). SHIN, Sung-Hyuk [KR/US]; 1531 8th Street, Fort  
Lee, NJ 07024 (US). ZEIRA, Ariela [US/US]; 8 Old Oak  
Road, Trumbull, CT 06611 (US).(74) Agents: VOLPE, Anthony, S. et al.; Volpe and Koenig,  
P.C., Suite 400, One Penn Center, 1617 John F. Kennedy  
Boulevard, Philadelphia, PA 19103 (US).(81) Designated States (national): AE, AL, AM, AT, AU, AZ,  
BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK,  
DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL,  
IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU,  
LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO,  
RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG,  
US, UZ, VN, YU, ZA, ZW.(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent  
(AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent  
(AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU,

[Continued on next page]

(54) Title: RANDOM ACCESS CHANNEL PREAMBLE DETECTION

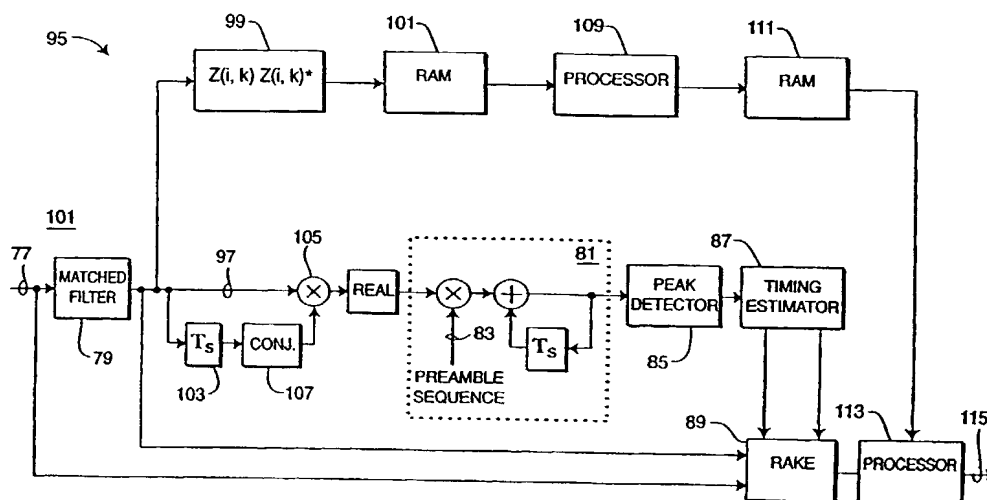


(57) Abstract: The present invention relates to a detector that detects a transmitted digital signature using the energy output from a matched filter. The energies are tabulated according to an anticipated signature pattern for variable transmission distances. The tabulation accounts for expected round trip transmission delays and allows processing of the accumulated symbols to derive a correct signature whether coherent or non-coherent signature coding is used and multiple Doppler channels are present.

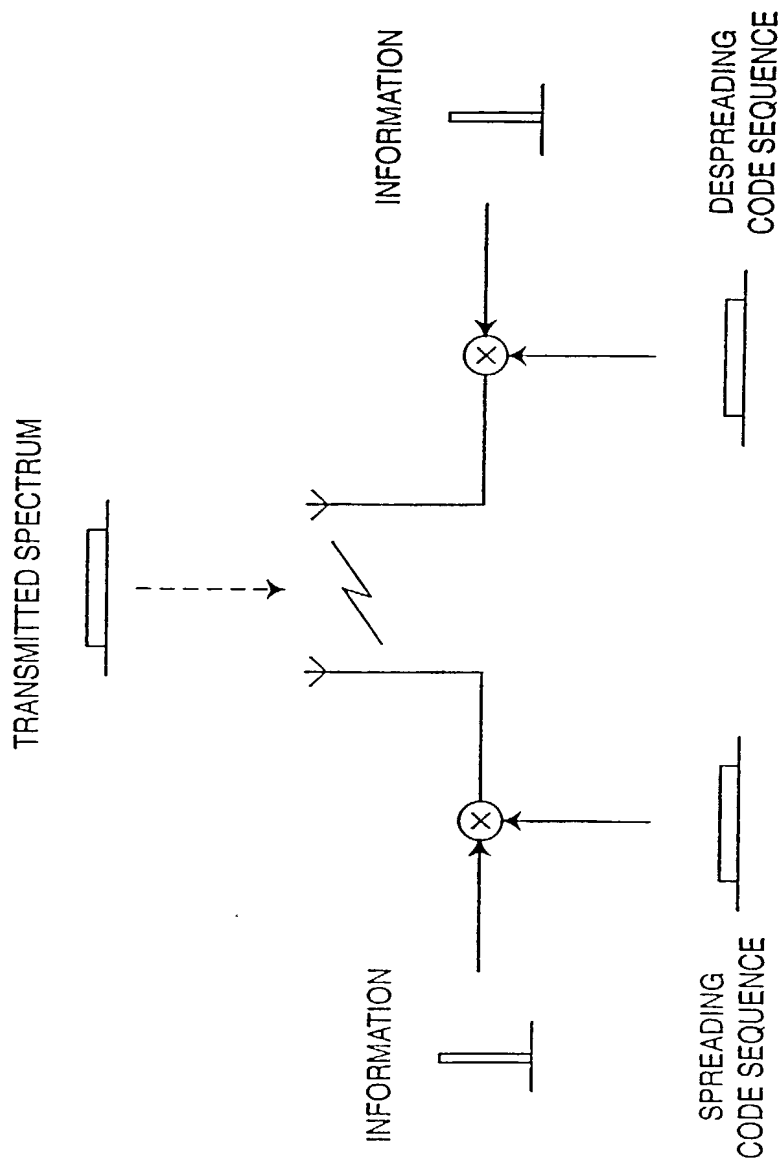

PREAMBLE SYMBOLS																
SIGNATURE	P0	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15
1	A	A	A	-A	-A	-A	A	-A	-A	A	A	-A	A	-A	A	A
2	-A	A	-A	-A	A	A	A	-A	A	A	A	-A	-A	A	-A	A
3	A	-A	A	A	A	-A	A	A	-A	A	A	A	-A	A	-A	A
4	-A	A	-A	A	-A	-A	-A	-A	-A	A	-A	A	-A	A	A	A
5	A	-A	-A	-A	-A	A	A	-A	-A	-A	-A	A	-A	-A	-A	A
6	-A	-A	A	-A	A	-A	A	-A	A	-A	-A	A	A	-A	A	A
7	-A	A	A	A	-A	-A	A	A	A	-A	-A	-A	-A	-A	-A	A
8	A	A	-A	-A	-A	-A	-A	A	A	-A	A	A	A	A	-A	A
9	A	-A	A	-A	-A	A	-A	A	A	A	-A	-A	-A	A	A	A
10	-A	A	A	-A	A	A	-A	A	-A	-A	A	A	-A	-A	A	A
11	A	A	A	A	A	A	-A	-A	A	A	-A	A	A	-A	-A	A
12	A	A	-A	A	A	A	A	A	-A	-A	-A	-A	A	A	A	A
13	A	-A	-A	A	A	-A	-A	-A	A	-A	A	-A	-A	-A	A	A
14	-A	-A	-A	A	-A	A	A	A	A	A	A	A	A	-A	A	A
15	-A	-A	-A	-A	A	-A	-A	A	-A	A	-A	-A	A	-A	-A	A
16	-A	-A	A	A	-A	A	-A	-A	-A	-A	A	-A	A	A	-A	A

FIG. 2  
PRIOR ART

3/13

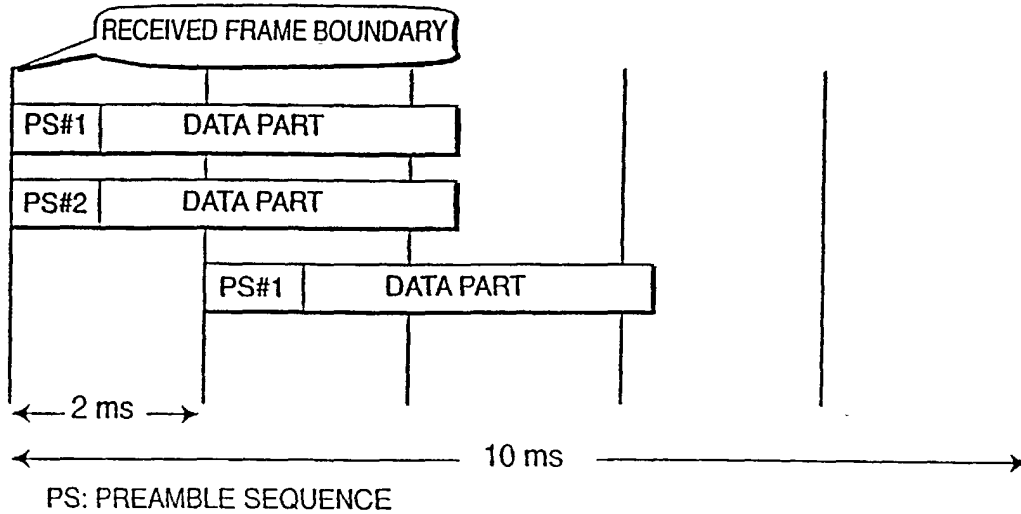

**FIG. 3**

19 SYMBOL INTERVALS

1	2	3	4	5	6	7		16	n	n	n
---	---	---	---	---	---	---	--	----	---	---	---

POSITION 1: A FIRST SYMBOL ARRIVES IN THE FIRST SYMBOL INTERVAL

**FIG. 4a**

n	1	2	3	4	5	6		15	16	n	n
---	---	---	---	---	---	---	--	----	----	---	---

POSITION 2: A FIRST SYMBOL ARRIVES IN THE SECOND SYMBOL INTERVAL

**FIG. 4b**

n	n	1	2	3	4	5		14	15	16	n
---	---	---	---	---	---	---	--	----	----	----	---

POSITION 3: A FIRST SYMBOL ARRIVES IN THE THIRD SYMBOL INTERVAL

**FIG. 4c**

n	n	n	1	2	3	4		13	14	15	16
---	---	---	---	---	---	---	--	----	----	----	----

POSITION 4: A FIRST SYMBOL ARRIVES IN THE FOURTH SYMBOL INTERVAL

**FIG. 4d**



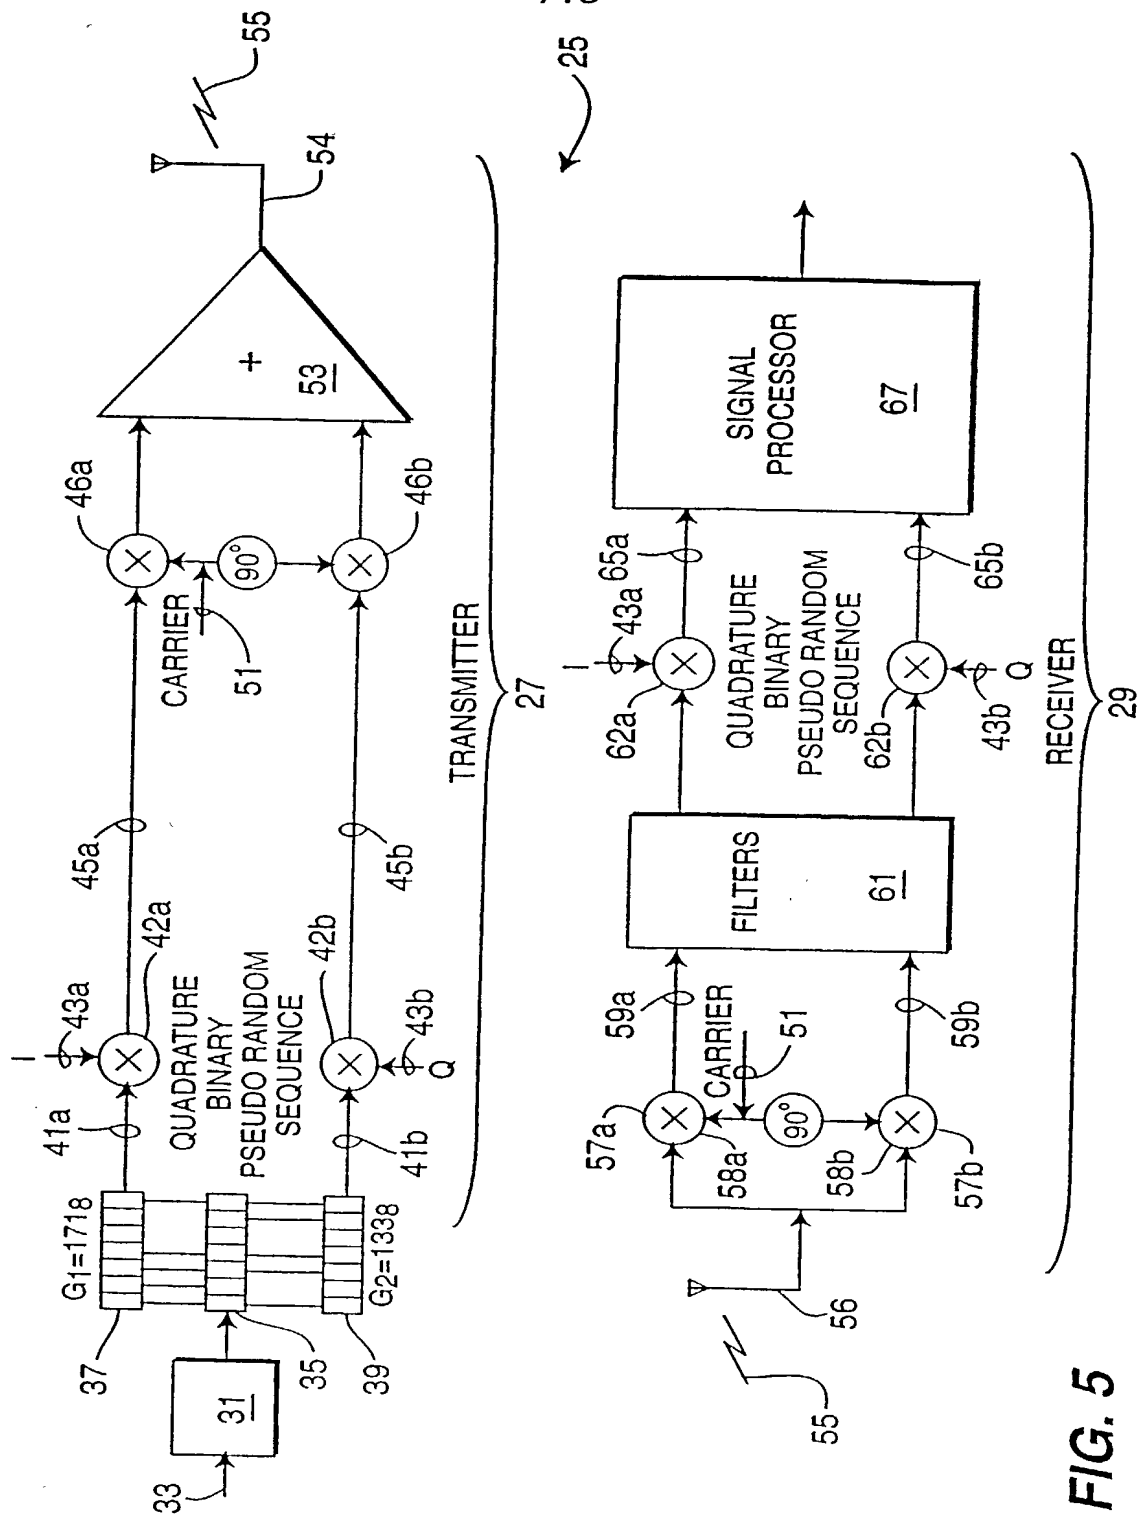


FIG. 5

WO 00/36761

PCT/US99/29504

5/13

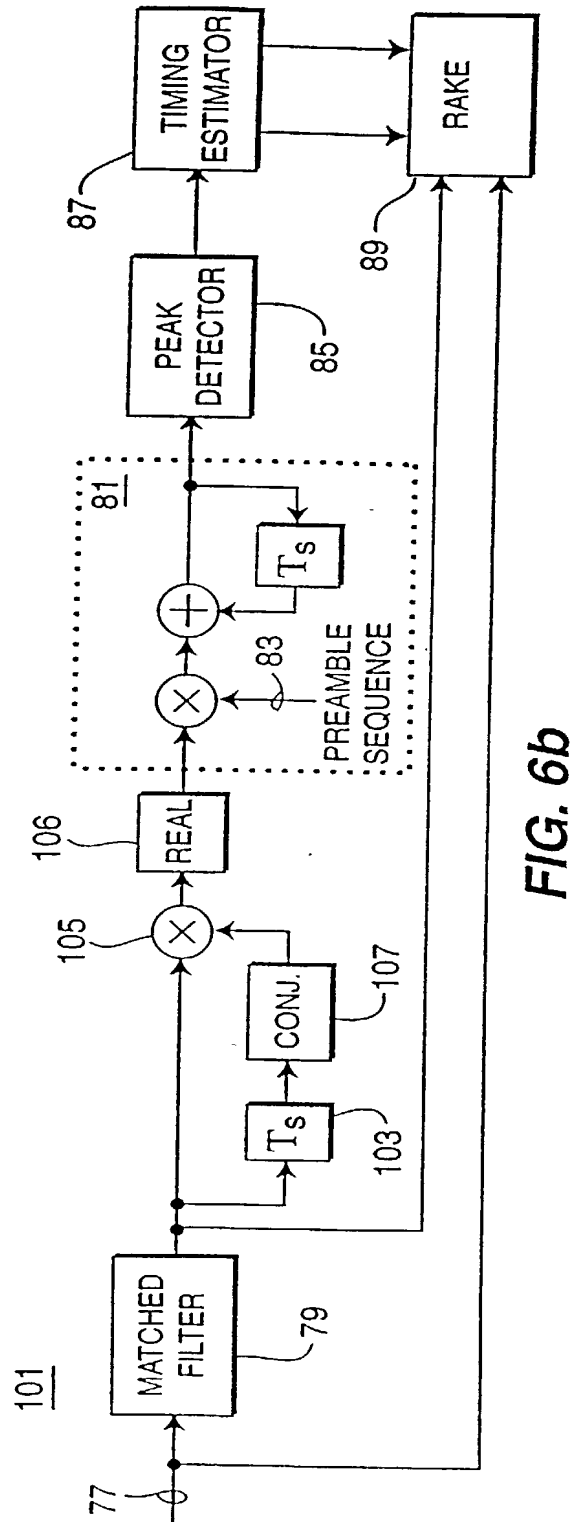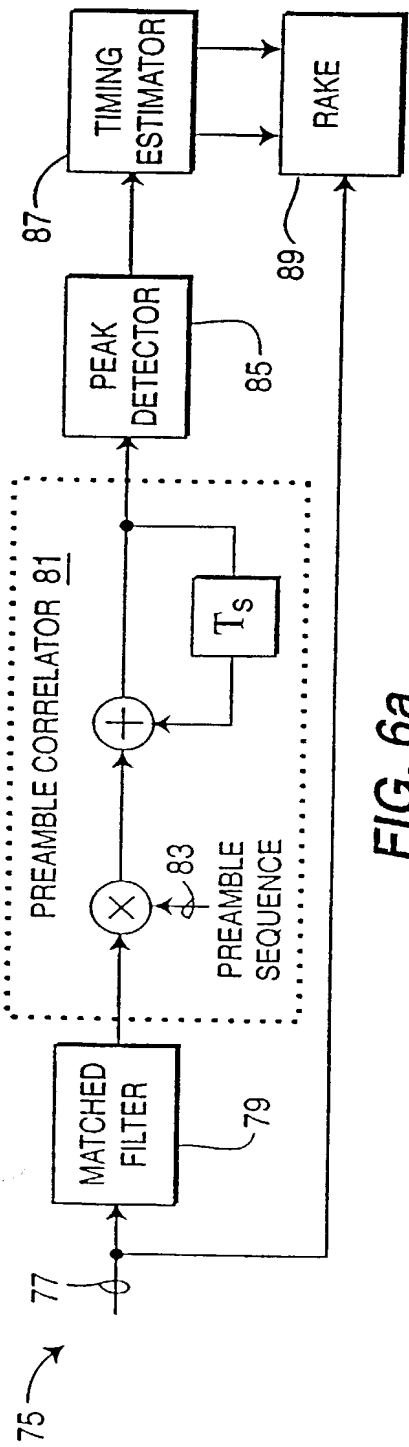

101

$$P(i, k) = Z(i, k) Z(i, k)^*$$

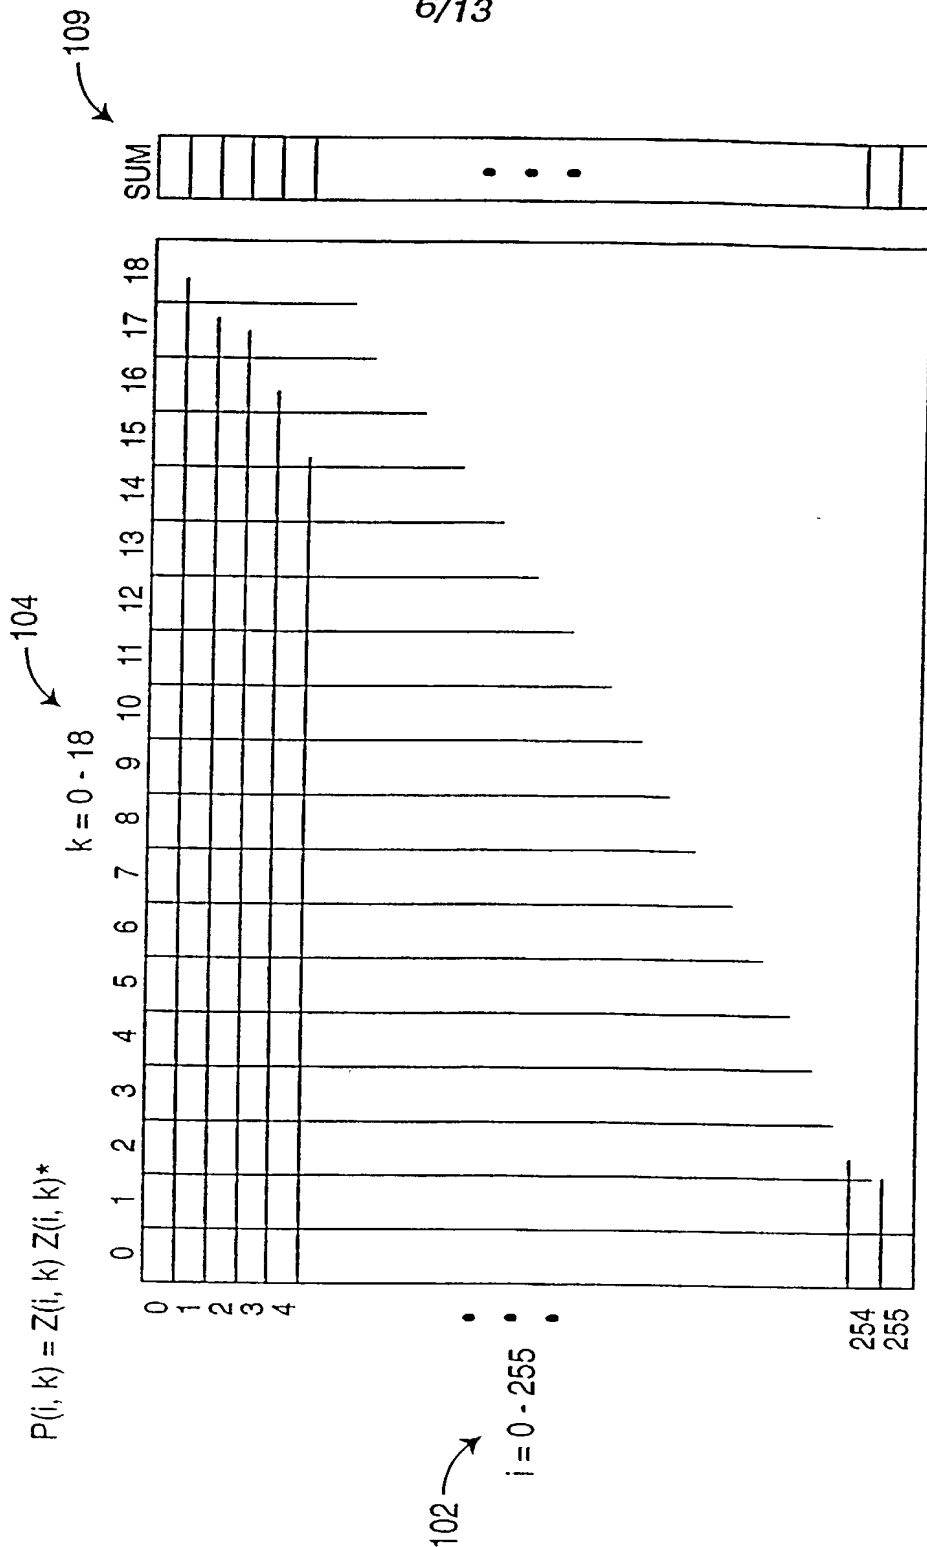


FIG. 7a

7/13

200



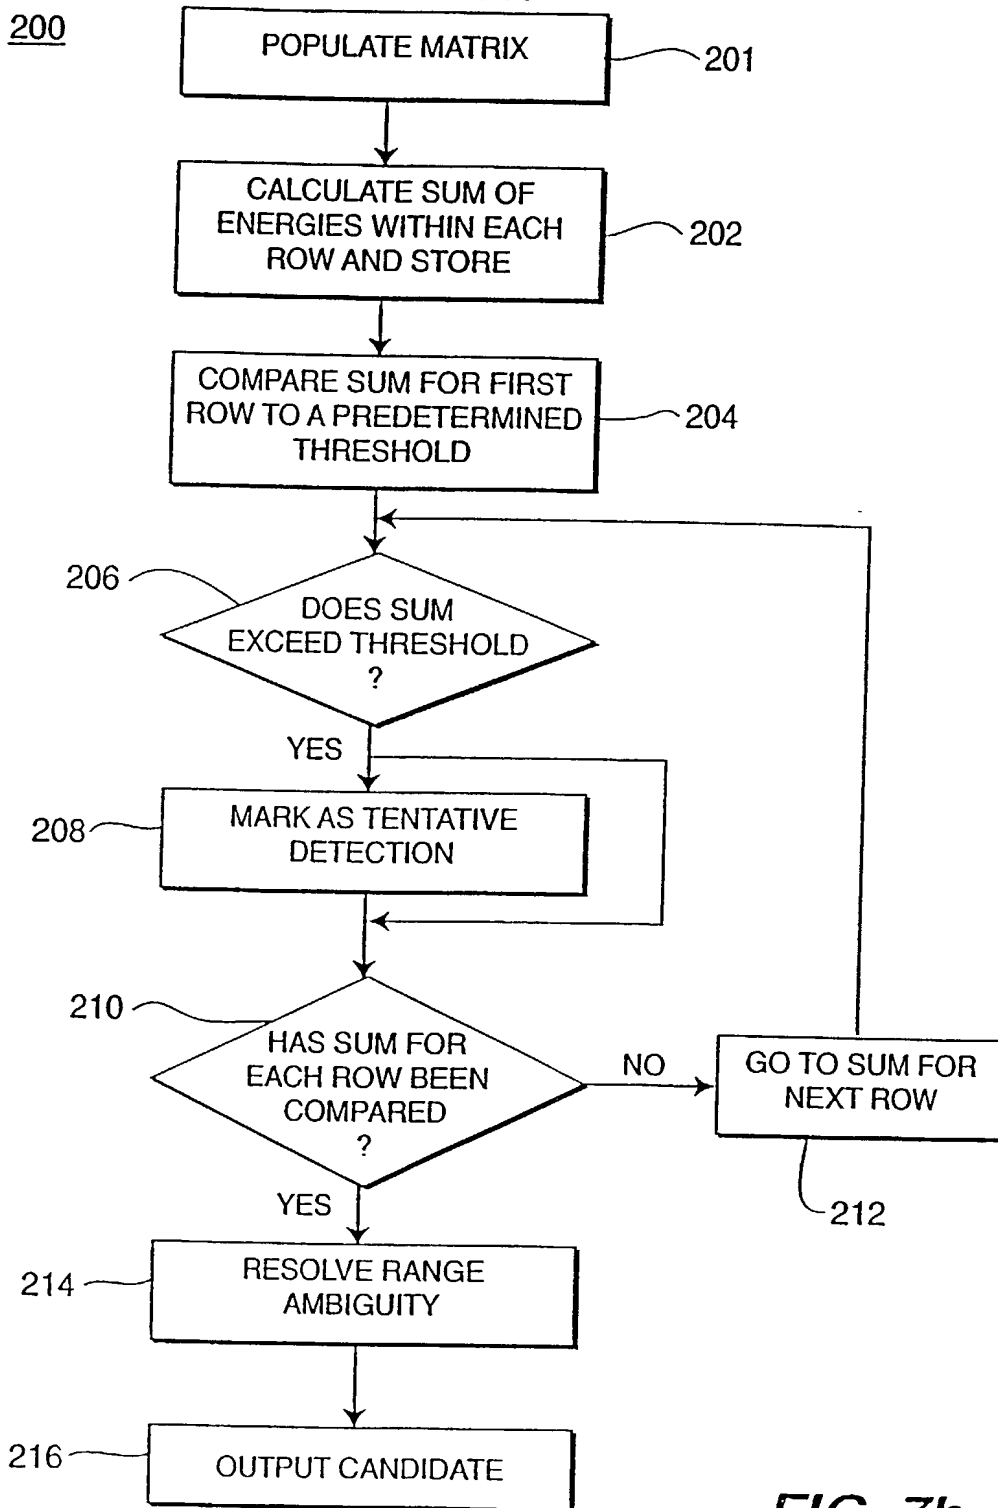


FIG. 7b

8/13

300**FIG. 7c**

9/13

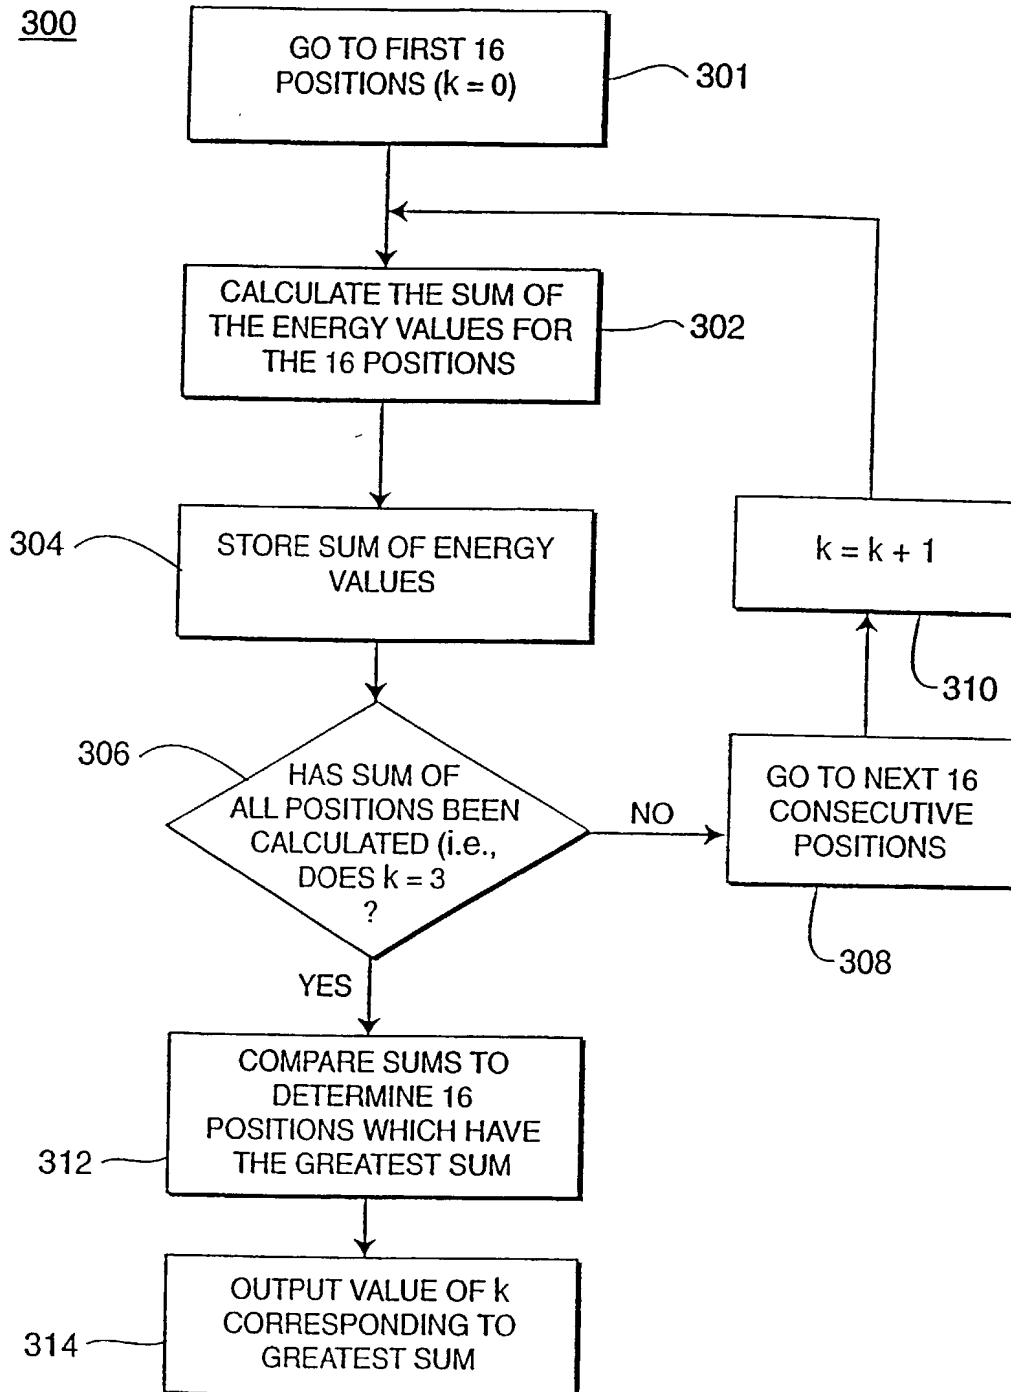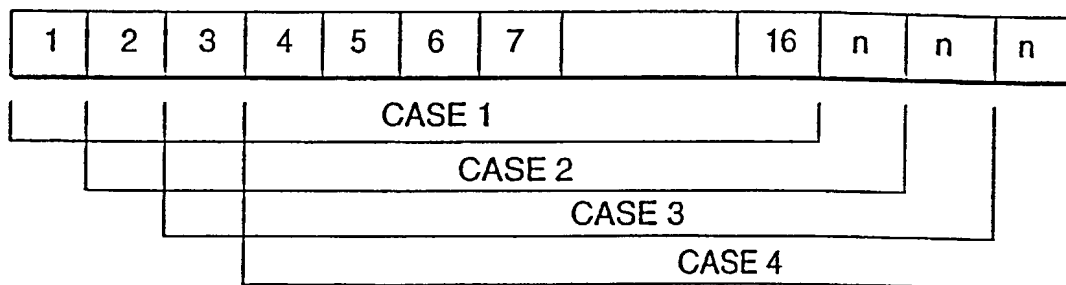

**FIG. 8**

	CASE 1	CASE 2	CASE 3	CASE 4
s1	100.00	0.39	1.56	0.39
s2	0.00	3.52	0.00	9.77
s3	0.00	9.77	0.00	3.52
s4	0.00	19.14	14.06	9.77
s5	0.00	3.52	6.25	0.39
s6	0.00	0.39	1.56	0.39
s7	0.00	9.77	6.25	0.39
s8	0.00	3.52	25.00	0.39
s9	0.00	19.14	1.56	3.52
s10	0.00	0.39	1.56	9.77
s11	0.00	3.52	6.25	3.52
s12	0.00	0.39	1.56	0.39
s13	0.00	0.39	14.06	9.77
s14	0.00	0.39	1.56	19.14
s15	0.00	9.77	6.25	9.77
s16	0.00	9.77	0.00	0.39

**FIG. 9**

	PREAMBLE SYMBOLS															
SIGNATURE	P0	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12	P13	P14	P15
1	A	A	A	-A	A	-A	-A	A	-A	-A	-A	A	A	-A	-A	-A
2	A	-A	-A	-A	A	-A	A	A	-A	A	-A	-A	-A	A	A	-A
3	A	-A	-A	-A	-A	A	A	A	-A	-A	-A	-A	A	A	-A	-A
4	A	-A	-A	A	A	A	A	A	A	-A	-A	A	A	-A	A	-A
5	A	-A	A	-A	A	A	A	-A	A	-A	A	A	-A	A	-A	-A
6	A	A	-A	-A	A	A	-A	-A	A	A	A	-A	A	-A	A	-A
7	A	-A	A	-A	-A	-A	A	-A	A	A	A	A	A	A	A	-A
8	A	A	-A	A	-A	A	-A	-A	-A	A	A	A	A	A	-A	-A
9	A	-A	-A	A	-A	-A	A	A	A	-A	-A	A	-A	-A	-A	-A
10	A	-A	A	A	-A	A	A	-A	-A	-A	A	-A	-A	-A	A	-A
11	A	A	A	A	A	A	-A	A	A	A	-A	-A	-A	A	-A	-A
12	A	A	-A	-A	-A	-A	-A	-A	A	-A	A	-A	-A	-A	-A	-A
13	A	-A	A	A	A	-A	A	-A	-A	A	A	-A	A	-A	-A	-A
14	A	A	A	-A	-A	A	-A	A	-A	A	-A	A	-A	-A	A	-A
15	A	A	A	A	-A	-A	-A	A	A	-A	-A	-A	A	A	A	-A
16	A	A	-A	A	A	-A	-A	-A	-A	-A	A	A	-A	A	A	-A

FIG. 10

11/13

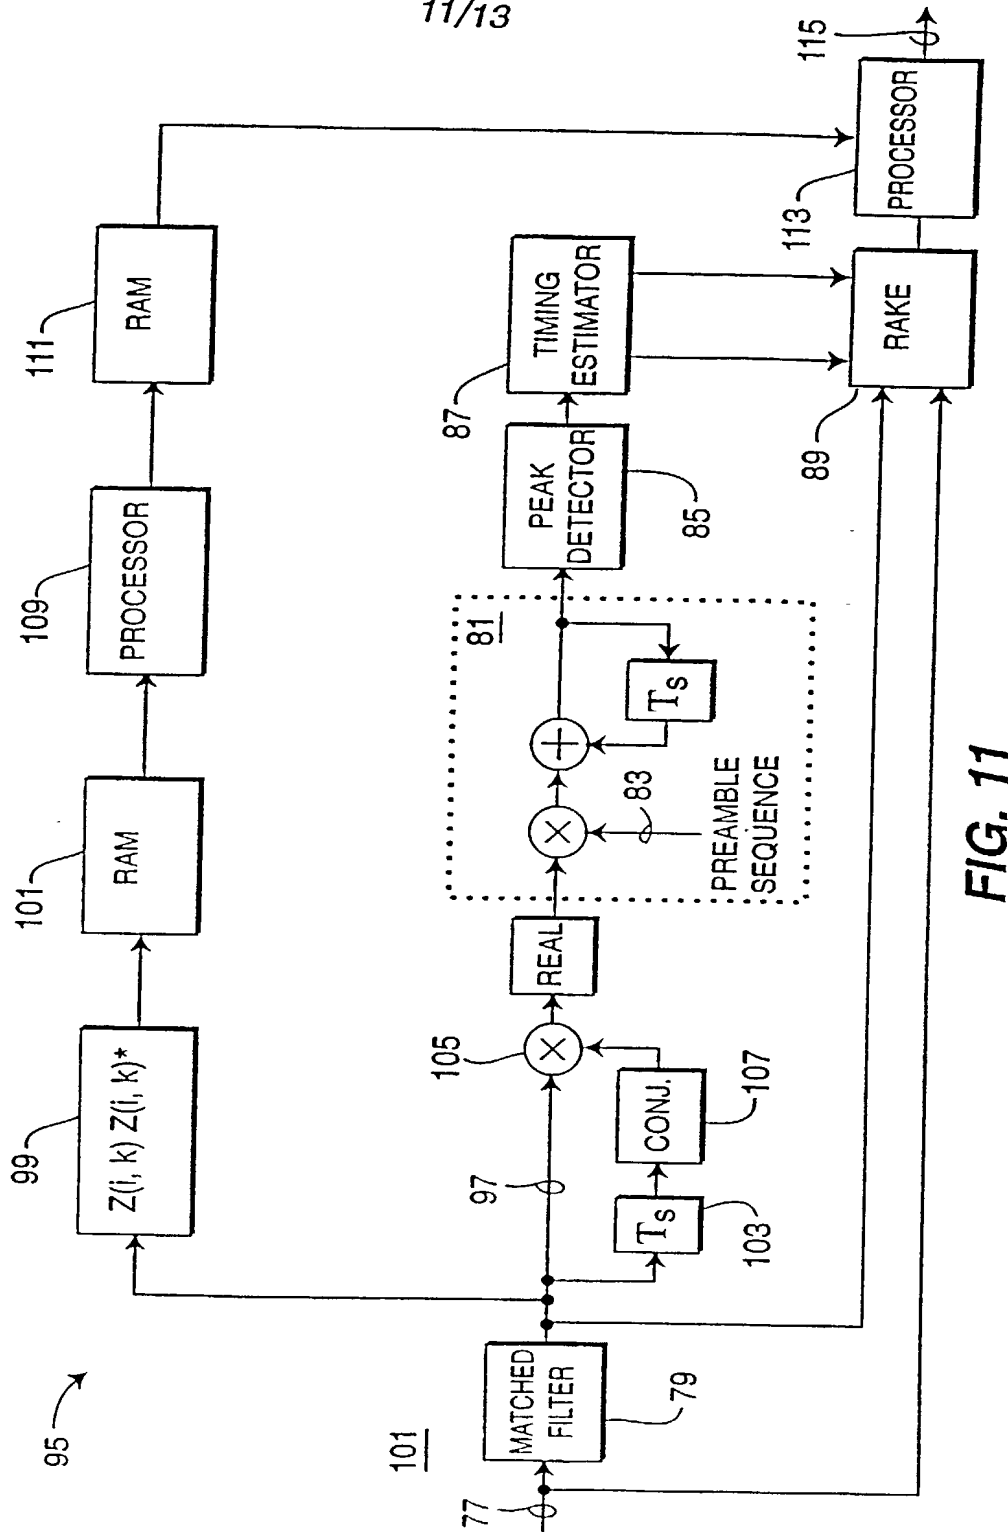
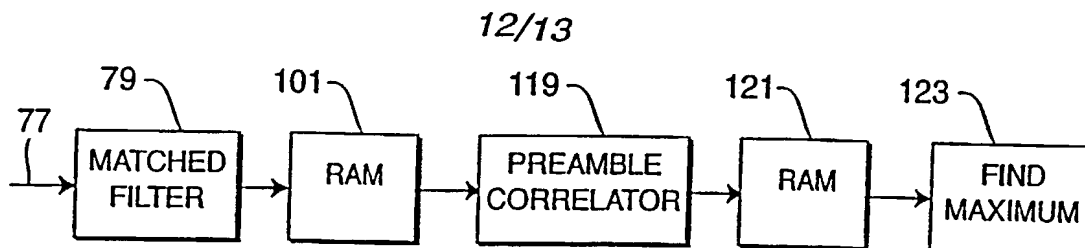
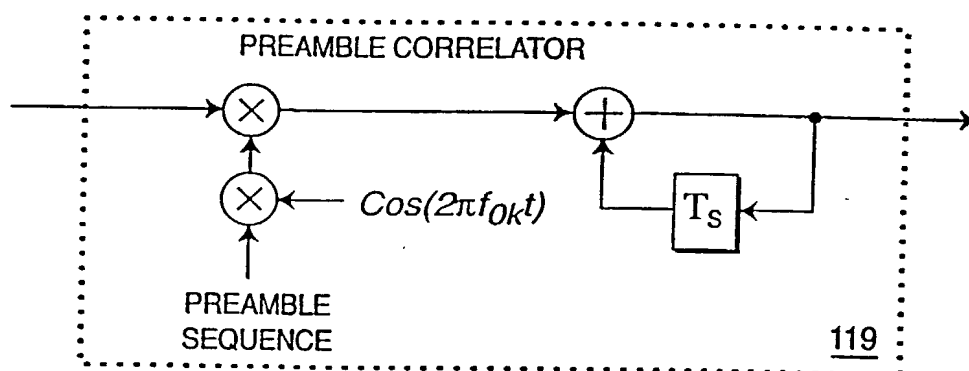


FIG. 11

**FIG. 12a****FIG. 12b**

$k$	0...255...	...4095														
$S(0,k)$	A	A	B	B	A	-A	-B	B	A	-A	B	-B	A	A	-B	-B
$S(1,k)$	A	A	B	B	A	-A	-B	B	-A	A	-B	B	-A	-A	B	B
$S(2,k)$	A	-A	B	-B	A	A	-B	-B	A	A	B	B	A	-A	-B	B
$S(3,k)$	A	-A	B	-B	A	A	-B	-B	-A	-A	-B	-B	-A	A	B	-B
$S(4,k)$	A	A	B	B	-A	A	B	-B	A	-A	B	-B	-A	-A	B	B
$S(5,k)$	A	A	B	B	-A	A	B	-B	-A	A	-B	B	A	A	-B	-B
$S(6,k)$	A	-A	B	-B	-A	-A	B	B	A	A	B	B	-A	A	B	-B
$S(7,k)$	A	-A	B	-B	-A	-A	B	B	-A	-A	-B	-B	A	-A	-B	B
$S(8,k)$	A	A	-B	-B	A	-A	B	-B	A	-A	-B	B	A	A	B	B
$S(9,k)$	A	A	-B	-B	A	-A	B	-B	-A	A	B	-B	-A	-A	-B	-B
$S(10,k)$	A	-A	-B	B	A	A	B	B	A	A	-B	-B	A	-A	B	-B
$S(11,k)$	A	-A	-B	B	A	A	B	B	-A	-A	B	B	-A	A	-B	B
$S(12,k)$	A	A	-B	-B	-A	A	-B	B	A	-A	-B	B	-A	-A	-B	-B
$S(13,k)$	A	A	-B	-B	-A	A	-B	B	-A	A	B	-B	A	-A	B	B
$S(14,k)$	A	-A	-B	B	-A	-A	-B	-B	A	A	-B	-B	-A	A	-B	B
$S(15,k)$	A	-A	-B	B	-A	-A	-B	-B	-A	-A	B	B	A	-A	B	-B

**FIG. 13**

13/13

		$S(i,k)$			
$M(i,k-1)$		A	-A	B	-B
	A	A	-A	$B = jA$	$-B = -jA$
	-A	-A	A	$-B = -jA$	$B = jA$
	B	$B = jA$	$-B = -jA$	-A	A
	-B	$-B = -jA$	$B = jA$	A	-A

FIG. 14

ORIG.	A	-A	B	-B	A	A	-B	-B	A	A	B	B	A	-A	-B	B
CODED	A	-A	-jA	-A	-A	-A	jA	A	A	A	jA	-A	-A	A	-jA	A

FIG. 15

$k$	0...255...
$S(0,k)$	A A B -A -A A -B A A -A -B -A -A -A B A
$S(1,k)$	A A B -A -A A -B A -A -A B -A A -A -B A
$S(2,k)$	A -A -B -A -A -A B A A A B -A -A A -B A
$S(3,k)$	A -A -B -A -A -A B A -A A -B -A A A B A
$S(4,k)$	A A B -A A A B A A -A -B -A A -A -B A
$S(5,k)$	A A B -A A A B A -A -A B -A -A -A B A
$S(6,k)$	A -A -B -A A -A -B A A A B -A A A B A
$S(7,k)$	A -A -B -A A -A -B A -A A -B -A -A A -B A
$S(8,k)$	A A -B -A -A A B A A -A B -A -A -A -B A
$S(9,k)$	A A -B -A -A A B A -A -A -B -A A -A B A
$S(10,k)$	A -A B -A -A -A -B A A A -B -A -A A B A
$S(11,k)$	A -A B -A -A -A -B A -A A B -A A A -B A
$S(12,k)$	A A -B -A A A -B A A -A B -A A -A B A
$S(13,k)$	A A -B -A A A -B A -A -A -B -A -A -A -B A
$S(14,k)$	A -A B -A -A -A B A A A -B -A A A -B A
$S(15,k)$	A -A B -A -A -A B A -A A B -A A A B A

FIG. 16

~~13~~

PTO/SB/01 (12-97)

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

☐ Declaration Submitted with Initial Filing      OR      ☒ Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)

**As a below named inventor, I hereby declare that:**

My residence, post office address, and citizenship are as stated below next to my name

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled \_\_\_\_\_

## RANDOM ACCESS CHANNEL PREAMBLE DETECTION

the specification of which (Title of the Invention)

☐ is attached hereto  
OR

☒ was filed on (MM/DD/YYYY) **06/14/2001** as United States Application Number or PCT International

Application Number 09/868,209 and was amended on (MM/DD/YYYY)                      (if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto

I hereby claim the benefit under 35 U S C 119(e) of any United States provisional application(s) listed below

Application Number(s)	Filing Date (MM/DD/YYYY)	
		<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

+

**Burden Hour Statement.** This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. **DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner for Patents, Washington, DC 20231.**



Please type a plus sign (+) inside this box →



PTO/SB/01 (12-97)

Approved for use through 9/30/00 OMB 0651-0032

Patent and Trademark Office, U S DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number

**DECLARATION — Utility or Design Patent Application**

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)
PCT/US99/29405	12/12/1999	

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith: ☒ Customer Number 24374 → Place Customer Number Bar Code Label here

OR

☐ Registered practitioner(s) name/registration number listed below

Name	Registration Number	Name	Registration Number
Namely, the Attorneys of Volpe and Koenig, P.C.			

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto

Direct all correspondence to: ☒ Customer Number 24374 OR ☐ Correspondence address below

Name	VOLPE AND KOENIG, P.C. DEPT. ICC				
Address					
Address					
City		State		ZIP	
Country		Telephone		Fax	

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon

Name of Sole or First Inventor:		<input type="checkbox"/> A petition has been filed for this unsigned inventor			
Given Name (first and middle [if any])		Family Name or Surname			
<u>Stephen G.</u>		<u>Dick</u>			
Inventor's Signature	<u>Stephen G. Dick</u>			Date	
Residence: City	<u>Neconset</u>	State	<u>NY</u>	Country	<u>USA</u>
Post Office Address	<u>61 Bobann Drive NY</u>				
Post Office Address					
City	<u>Neconset</u>	State	<u>NY</u>	ZIP	<u>11767</u>
				Country	<u>USA</u>

☒ Additional inventors are being named on the 2 supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto

Express Mail Label No. \_\_\_\_\_

Please type a plus sign (+) inside this box →



PTO/SB/02A (11-00)

Approved for use through 10/31/2002 OMB 0651-0032

U S Patent and Trademark Office, U S DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number

**DECLARATION****ADDITIONAL INVENTOR(S)****Supplemental Sheet**Page 1 of 2

<b>Name of Additional Joint Inventor, if any:</b>		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any))		Family Name or Surname	
Charles		Dennean	
Inventor's Signature <i>Charles Dennean</i>		Date <i>2/8/02</i>	
Residence: City <i>Melville</i>	State <i>NY</i>	Country <i>USA</i>	Citizenship <i>USA</i>
Mailing Address <i>53 Vermont Street</i>		<i>NY</i>	
Mailing Address			
City <i>Melville</i>	State <i>NY</i>	ZIP <i>11747</i>	Country <i>USA</i>
<b>Name of Additional Joint Inventor, if any:</b>		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any))		Family Name or Surname	
Eldad		Zeira	
Inventor's Signature <i>Eldad Zeira</i>		Date <i>2/11/02</i>	
Residence: City <i>Huntington</i>	State <i>NY</i>	Country <i>USA</i>	Citizenship <i>USA</i>
Mailing Address <i>239 West Neck Road</i>		<i>NY</i>	
Mailing Address			
City <i>Huntington</i>	State <i>NY</i>	ZIP <i>11743</i>	Country <i>USA</i>
<b>Name of Additional Joint Inventor, if any:</b>		<input type="checkbox"/> A petition has been filed for this unsigned inventor	
Given Name (first and middle (if any))		Family Name or Surname	
Jung-Lin		Pan	
Inventor's Signature <i>Jung-Lin Pan</i>		Date <i>2/12/2002</i>	
Residence: City <i>Selden</i>	State <i>NY</i>	Country <i>USA</i>	Citizenship <i>TW</i>
Mailing Address <i>15 Court St.</i>		<i>NY</i>	
Mailing Address			
City <i>Selden</i>	State <i>NY</i>	ZIP <i>11784</i>	Country <i>USA</i>

Burden Hour Statement. This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U S Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231

[illegible]

Please type a plus sign (+) inside this box

PTO/SB/02A (11-00)

Approved for use through 10/31/2002 OMB 0651-0032

U S Patent and Trademark Office, U S DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

**ADDITIONAL INVENTOR(S)**  
**Supplemental Sheet**  
Page 2 of 2

Country

**Burden Hour Statement** This form is estimated to take 21 minutes to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. **DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231**